

08/27/98
JCS60 U.S. PTO

S&H Form: PTO/SB/05 (12/97)

UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No. 1046.1190/JDH

First Named Inventor or Application Identifier:

Hiroshi ISOMURA

Express Mail Label No.

(Only for new nonprovisional applications under 37 CFR 1.53(b))

JCS41 U.S. PTO
09/14/98
08/27/98

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract [Total Pages: 27]
3. ☒ Drawing(s) (35 USC 113) [Total Sheets: 8]
4. ☒ Oath or Declaration [Total Pages: 3]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
12. ☒ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application, status still proper and desired.
15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: /

18. CORRESPONDENCE ADDRESS

STAAS & HALSEY
Attn: James D. Halsey, Jr.
700 Eleventh Street, N.W., Suite 500
Washington, DC 20001

Telephone: (202) 434-1500
Facsimile: (202) 434-1501

NEW APPLICATION FEE TRANSMITTAL		Attorney Docket No.	1046.1190/JDH
		Application Number	Unassigned
		Filing Date	August 27, 1998
AMOUNT ENCLOSED	\$ 830.00	First Named Inventor	Hiroshi ISOMURA

FEE CALCULATION (fees effective 10/01/97)

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS	8 - 20 =	0	X \$ 22.00 =	\$ 0.00
	INDEPENDENT CLAIMS	3 - 3 =	0	X \$ 82.00 =	0.00
	MULTIPLE DEPENDENT CLAIMS (any number; if applicable)			+ \$270.00 =	0.00
	BASIC FILING FEE				+ 790.00
	Total of above Calculations =				\$ 790.00
	Surcharge for late filing fee, Statement or Power of Attorney (\$130.00)				+ 0.00
	Reduction by 50% for filing by small entity (37 CFR 1.9, 1.27 & 1.28).				- 0.00
	TOTAL FILING FEE =				\$ 790.00
	Surcharge for filing non-English language application (\$130.00; 37 CFR 1.52(d))				+ 0.00
	Recordation of Assignment (\$40.00; 37 CFR 1.21(h)(1))				+ 40.00
	TOTAL FEES DUE =				\$ 830.00

METHOD OF PAYMENT

- ☒ Check enclosed as payment.
- ☐ Charge "TOTAL FEES DUE" to the Deposit Account No., below.
- ☐ No payment is enclosed and no charges to the Deposit Account are authorized at this time.

GENERAL AUTHORIZATION


- ☒ If the above-noted "AMOUNT ENCLOSED" is not correct, the Commissioner is hereby authorized to credit any overpayment or charge any additional fees necessary to:

Deposit Account No. 19-3935

Deposit Account Name STAAS & HALSEY

- ☒ The Commissioner is also authorized to credit any overpayments or charge any additional fees required under 37 CFR 1.16 (filing fees) or 37 CFR 1.17 (processing fees) during the prosecution of this application, including any related application(s) claiming benefit hereof pursuant to 35 USC § 120 (e.g., continuations/divisionals/CIPs under 37 CFR 1.53(b) and/or continuations/divisionals/CPAs under 37 CFR 1.53(b)) to maintain pendency hereof or of any such related application.

SUBMITTED BY: STAAS & HALSEY

Typed Name	James D. Halsey, Jr.	Reg. No.	22,729
Signature		Date	August 27, 1998

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Hiroshi ISOMURA

Serial No.: To Be Assigned

Filed: August 27, 1998

Group Art Unit: To Be Assigned

Examiner: To Be Assigned

For: TELEPHONE WITH ELECTRONIC MAIL MANAGEMENT FUNCTION,
ELECTRONIC MAIL MANAGEMENT METHOD, AND STORAGE MEDIUM
STORING ELECTRONIC MAIL MANAGEMENT PROGRAM

PRELIMINARY AMENDMENT

*Assistant Commissioner for Patents
Washington, D.C. 20231*

Sir:

Before examination of the above-identified application, please amend the application as follows:

IN THE SPECIFICATION:

Please AMEND the specification as follows:

Page 25, line 20, replace "7." with --8.--

REMARKS

This Preliminary Amendment is submitted to improve the form of the claims as originally-filed.

It is respectfully requested that this Preliminary Amendment be entered in the above-referenced application.

Preliminary Amendment

Docket No.: 1046.1190/JDH


If any further fees are required in connection with the filing of this Preliminary Amendment, please charge same to our Deposit Account No. 19-3935.

Respectfully submitted,

STAAS & HALSEY

Dated: August 27, 1998

By:



James D. Halsey, Jr.
Registration No. 22,729

700 Eleventh Street, N.W.
Suite 500
Washington, D.C. 20001
(202) 434-1500

TELEPHONE WITH ELECTRONIC MAIL MANAGEMENT FUNCTION,
ELECTRONIC MAIL MANAGEMENT METHOD, AND STORAGE MEDIUM
STORING ELECTRONIC MAIL MANAGEMENT PROGRAM

BACKGROUND OF THE INVENTION

5 1.FIELD OF THE INVENTION

The present invention relates to an effective technique to be applied to management for transmission-reception of electronic mail (E-mail) in Internet or in a personal computer communication.

10 E-mail is generally used as a communication tool for business or private use. It is general that such a E-mail is transmitted-received by using each computer connected to LAN in a company or by connecting a personal computer with a telephone line for dial-up
15 connection to a provider for private use.

A business person, who goes out many times, uses often plural kinds of electronic information devices in order to transmit-receive E-mails in any environment for transmitting-receiving E-mail, for example, a desk-top
20 personal computer in an office, a personal digital assistants when going out and a notebook personal computer at a home.

However, when one person uses plural electronic

information devices in order to transmit-receive E-mails
in this way, it is difficult to manage E-mails
integratedly. Therefore, for example, there are cases in
that an E-mail is down-loaded twice or more and a needed
5 E-mail is down-loaded by another electronic information
device, hereby incapable of being used.

To give further concrete explanations of this
problem, a prior art is explained with reference to
FIG.1.

10 FIG. 1 is an explanatory view showing conventional
E-mail management.

In this explanation, an user uses three terminal
devices. Explanations are given of a case in that the
user uses three terminal devices 101, 102, 103 and E-
15 mails are transmitted-received via a provider server 104
and a telephone line 106.

It is assumed that the user chooses the device 101
such as a portable digital assistant carried when going
out, the device 102 such as a notebook personal computer
20 used when moving through rooms, and the device 103 such
as desk-top personal computer used by fixing at a
location. All of the devices are respectively provided
with memories, and it is possible to store down-loaded

E-mails in each of memories.

The user, when down-loading an E-mail arriving at the provider server 104, calls the provider server 104 via the telephone line 106 from one of the devices 101, 102 or 103 held at that time, and receives the E-mail by the device 101, 102 or 103 of which an address is given as a dial-up IP in the E-mail. Further, the E-mail in the provider server 104 after receiving may be deleted or stored.

10 It is assumed that the user, when accessing the provider server 104, down-loads an E-mail 104 in the provider server 104 with the device 101, and then deletes the E-mail 104a from the provider server 104. After this, through the user is necessary to refer or
15 use the E-mail 104a while using the device 202, there is no information of the E-mail 104a in the memory of the device 202. In other words, the E-mail 104a exists only in the memory of the device 101, therefore, the user can not refer the E-mail 104a when not keeping the device
20 101 at hand.

To prevent such a case, it is necessary to remain the E-mail 104a without deleting the E-mail 104a from the provider server 104 after down-loading the E-mail

104a with one of the devices (101, 102 or 103) in order to keep a situation in that the E-mail 104a can be used again.

However, in this use style, enormous E-mail
5 information will remain in the memory of the provider server 104, and a large quantity of already-read E-mails obstructs to receive a new E-mail. As a result, there is a possibility in that E-mail management is directly obstructed in the provider server 104.

10

SUMMARY OF THE INVENTION

The present invention is achieved in views of these problems, and has its object to provide a technique capable of managing E-mails effectively without imposing a burden on the provider server by an environment
15 capable of managing E-mails integratedly even if an E-mail is deleted after being down-loaded from an provider server.

The first aspect of the present invention is a telephone with an electronic mail managing function. The
20 telephone is capable of connecting with at least a mail server and a plurality of terminal devices, and is provided with an access unit for accessing to the mail

server, a mail memory for storing an electronic mail
down-loaded from the mail server through the access
unit, a mail status memory for storing each status of
the electronic mail stored in the mail memory unit so as
5 to correspond to each of the terminal devices, and a
transmission unit for transmitting the electronic mail
stored in the mail memory to one of the terminal
devices.

When one person owns several terminal devices, the
10 telephone receives electronic mails integratedly from
the mail server (a provider server). It is possible to
refer and re-use unread and read mails with the terminal
device by accessing the telephone. Further, since the
mail status showing whether the E-mail is transmitted or
15 not is managed for each terminal device by the mail
status memory, it is possible to manage mails
integratedly by referring to the mail status memory.
Thus, it is possible to prevent to mis-delete an
electronic mail and to store unnecessary electronic
20 mails.

The second aspect of the present invention carries
out to store whether or not the electronic mail is down-
loaded to each of the terminal devices in the first

aspect.

With this second aspect, it is possible to know that the electronic mail is loaded to which terminal device, and it is possible to prevent to mis-delete an
5 electronic mail certainly.

The third aspect of the present invention is provided with a process table for storing a process to be applied to the electronic mail after down-loading for each of the terminal devices in addition to the first
10 aspect.

The process to be applied to the electronic mail after down-loading includes to delete the electronic mail and to keep the electronic mail.

For example, it may be set that an electronic mail
15 at the telephone side is deleted when the electronic mail is down-loaded to a specified terminal device. In this way, when an terminal device finally managing electronic mails is specified, it becomes certain to manage electronic mails integratedly.

20 The fourth aspect of the present invention is provided with an emergency process unit for judging whether or not a priority process is necessary based on the electronic mail received from each of the terminal

devices and for executing an access to the mail server when the priority process is executed in addition to the first aspect.

A flag showing a priority or the like is used,
5 whereby it is possible to determine a priority of that the telephone deals with the electronic mail transmitted from the terminal device. Accordingly, for example, when the telephone receives an electronic mail in which an emergency process flag is set, this electronic mail is
10 transmitted to the mail server promptly. When no priority is set in an electronic mail, this electronic mail is transmitted to the mail server from the telephone at a time for the access to the mail server, the time specified by a timer.

15 The fifth aspect of the present invention is provided with an identifier memory for storing an identifier of an terminal device to be connected in addition to the first aspect. In this aspect, it is permitted to access from the terminal device of which an
20 identifier coincides with the stored identifier.

With the fifth aspect, it is possible to improve security of the telephone dealing with electronic mails.

The sixth aspect of the present invention is a mail

managing method in a mail managing apparatus capable of transmitting/receiving mail data to/from at least a mail server and a plurality of terminal devices. In this method, a mail stored in the mail server is read, the
5 read mail is stored, a status of the stored mail is displayed for each of the terminal devices, and the stored mail is transmitted to one of the terminal devices.

With this method, it is possible to manage
10 electronic mails integratedly, and it is also possible to prevent to mis-delete electronic mails and to store unnecessary electronic mails, similarly to the first aspect.

The seventh aspect of the present invention is a
15 storage medium storing a program used for a mail managing apparatus capable of transmitting/receiving mail data to/from at least a mail server and a plurality of terminal devices. This program includes a reading step of reading a mail stored in the mail server, a
20 storing step of storing the mail read in the reading step, a display step of displaying a status of the mail stored in the storing step for each of the terminal devices, and a transmission step of transmitting the

mail stored in the storing step to one of the terminal devices.

The seventh aspect is a storage medium storing a program carrying out the steps of the sixth aspect. As
5 storage media, it is possible to use all types of storage media capable of storing program such as CD-ROM, CD-R, a memory card based on PCMCIA, a magnetic disk unit. When a memory card is used, a memory card storing this program is attached to a multi-function telephone,
10 whereby it is possible to carry out a telephone with the mail managing function described in the first aspect.

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects and advantages of the present invention will become apparent during the following
15 discussion conjunction with the accompanying drawings, in which:

FIG. 1 is an explanatory view showing a status in that plural terminal devices access a provider server in the conventional technique;

20 FIG. 2 is a view showing of a system configuration of an embodiment according to the present invention;

FIG. 3 is a block diagram showing a hardware

configuration of a telephone in an embodiment;

FIG. 4 is a block diagram showing a hardware configuration of a sub-device in an embodiment;

FIG. 5 is a explanatory view showing a mail status table in an embodiment;

FIG. 6 is an explanatory view showing a mail status table in an embodiment

FIG. 7 is an explanatory view showing a mail status table in an embodiment;

FIG. 8 is an explanatory view showing a process table in an embodiment;

FIG. 9 is a flowchart showing a procedure in that a telephone accesses a provider server and deals with E-mail in an embodiment; and

FIG. 10 is a flowchart showing a procedure in that an terminal device accesses a telephone and deals with E-mail in an embodiment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Hereinafter, explanations will be given of an embodiment according to the present invention with reference to drawings.

FIG. 2 shows a system configuration of an

embodiment according to the present invention.

This system shown in FIG. 2 has a function in that a telephone 201 manages a E-mail 104b in the provider server 104 integratedly. A detail description will be
5 given of this telephone 201.

It is assumed that one user uses three terminal devices (including electronic devices and information devices) similarly to the prior art shown in FIG 1. The user uses the devices 101, 102 and 103, so as to
10 transmit-receive a E-mail via the provider server 104 and the telephone line 106.

For example, it is assumed that the user chooses the device 101 such as a portable digital assistant to be carried when going out, the device 102 such as a
15 notebook personal computer used when moving through rooms, or a device 103 such as a desk-top personal computer to be used at a fixed position. Each of these devices is provided with a memory, and it is possible to store the down-loaded E-mail in the memory.

20 Next, explanations will be given of a configuration of the telephone 201 according to this embodiment with reference to FIGs. 2 and 3.

The telephone 102 is provided with a telephone line

connecting part 301, a line signal processing part 302,
a receiver 303, a process controlling part 304, a memory
305, a infrared communicating part 306, a display 307, a
voice synthesizing part 308, a speaker 309, a timer 310,
5 radio communicating part 311, an antenna 312, a button
switch 313, and a power source 314.

The telephone line connecting part 301 is used to
connect with a connector cable of a public line (a
digital line or an analog line), and is shown as a
10 modular jack in FIG. 2.

The signal processing part 302 controls
input-output of this telephone 201. The receiver 303 is
shown as a hand set having an earpiece and a mouthpiece
in FIG. 2. The process controlling part 304 is a CPU
15 controlling reception of E-mail and the memory 305. The
memory 305 is a nonvolatile memory, dynamic RAM or the
like, and stores programs such an access program to the
provider server 104, the E-mail 104b down-loaded from
the provider server 104, and the like. The memory 305
20 can also store voice data such as a message. The memory
305 also keeps an ID of an terminal device capable of
communicating with this telephone 201. The process
controlling part 304 reads the ID stored in the memory

305 in order to judge whether or not the terminal device 103 communicating with the infrared communication part 306 is permitted for data communication.

Further, the memory 305 is provided with a mail state table 501 shown in FIGs. 5 through 7. The mail status table 501 show that the E-mail stored in the memory 305 is transmitted to which terminal device. FIG. 5 shows that the E-mail 104b is already transmitted to the terminal device 101, and is not yet transmitted to the terminal devices 102 and 103. FIG. 6 shows that the E-mail 104b is already transmitted to the terminal devices 101 and 102, and is not yet transmitted to the terminal device 103.

FIG. 7 shows that the E-mail 104b is already transmitted to all the terminal devices 101, 102 and 103.

The infrared communicating part 306 is a port communicating with the external terminal device 103 or the like. The display 307 is a liquid crystal display or the like, and displays information such as a extension number, a transmitted outside line number, and a receiving telephone number when the telephone 201 is used normally. In this embodiment, the display 307

displays that an E-mail is received from the provider server 104.

In the memory 305, a process table 801 shown in FIG. 8 is established. The process table 801 shows a process after the E-mail stored in the memory 305 of the telephone 201 is transmitted to each terminal device. In other words, it is possible to set whether or not the transmitted E-mail is stored in the memory or deleted. FIG. 8 shows a sample in that E-mail data is stored in the memory 305 when the E-mail is transmitted to the terminal devices 101 and 102 and a E-mail is deleted when the E-mail is transmitted to the terminal device 103. This is suitable to a case in that the user can read the E-mail with the terminal devices 101 and 102 while managing the E-mail only with the terminal device 103.

It is also possible to delete an E-mail in the memory 305 directly by an instruction from the user, regardless of contents in the process table 801.

The voice synthesizing part 308 executes voice synthesis so as to read a received E-mail aloud. The voice synthesizing part 308 converts a character code of the E-mail read from the memory 305 into a voice signal,

and outputs contents of the E-mail as voice information through the speaker 309.

The timer 310 executes an automatic access to the provider server 104 regularly, namely, a so-called timer
5 access. In other words, the timer 310 generates a trigger signal at a predetermined interval or at a predetermined time, and an interrupt instruction is given to the process controlling part 304. Then, the access program stored in the storage 305 starts, and the
10 telephone 201 starts an access to the provider server 104. Thereafter, the E-mail 104b in the provider server 104 is down-loaded.

The radio communicating part 311 is capable of communicating with the sub-device 202 or the terminal
15 devices 101, 102 and 103 by the radio signal through the antenna 312.

The button switch 313 includes a ten-key group used to input a calling number, and an alphabet key group or a kana key group used to input characters.

20 FIG. 4 is a block diagram showing an internal function structure of the sub-device 202 when the telephone is used as a main-device.

The sub-device 202, as shown in FIG. 4, is provided

with a process controlling part 415, a memory 416, an infrared communicating part 417, a receiver 418, a battery 419, a radio communicating part 420, an antenna 412, and a button switch 422.

5 The process controlling part 415 is a CPU controlling the reception/transmission of the E-mail and controlling the memory 416.

10 The memory 416 is a nonvolatile memory, a dynamic RAM or the like. The memory 416 keeps a process program such as an access program to the provider server 104, E-mails down-loaded from the provider server 104, or the like. The memory 416 also keeps voice data such as a message. Further, in the memory 416, a status table shown in FIGs. 5 through 7 is set, similarly to the
15 main-device.

 Additionally, the sub-device 202 is capable of accessing the provider server 104 by radio communication through the telephone 201, which is the main-device. When the sub-device 202 accesses the provider server
20 104, the E-mail down-loaded from the provider server 104 may be stored in the memory 305 of the telephone 201 which is the main-device or may be stored in the memory 416 of the sub-device 202.

The infrared communicating part 417 is a port communicating with the external terminal device 103 or the like. The receiver 418 is provided with a mouthpiece and an earpiece.

5 The battery 419 supplies an actuation voltage to the sub-device 202, and is a dry battery or a charged battery.

10 The radio communicating part 420 is capable of communicating with the telephone 201 and the terminal devices 101, 102, 103 by a radio signal through the antenna 421.

 The button switch 422 is provided with a ten-key group used to input a calling number, and an alphabet key group or a kana key group used to input characters.

15 Explanations will be given of the management procedure by the above-described system with reference to FIGs. 9 and 10.

 In this embodiment, explanations will be given of a case in that E-mail data is communicated between the telephone 201 as a main device and the terminal device 103. Then, no explanation will be given of a case in that E-mail data is communicated between the sub-device 202 and the terminal device 103, since this case is

similar to the above-mentioned case.

First, it is assumed that an E-mail 104b addressed to an user is received by the provider server 104.

The telephone 201 accesses to the provider server
5 104 through the telephone line 106, when it is time designated by an instruction from the timer (Step S901).

The telephone 201, when being connected with the provider server 104, checks whether or not a mail addressed to itself arrives at the provider server 104
10 (Step S902). When the E-mail 104b arrives at the provider server 104, the E-mail 104b in the provider server 104 is down-loaded (Step S903), and stored in the memory 305 (Step S904).

Then, the display 307 displays that the down-loaded
15 E-mail 104b is stored in the memory 305, such as "there is a received mail". Further, the display 307 may display titles or contents of an unread mail (a mail downloaded to none of terminal devices) (Steps 908, 909). It is also possible to notify a destination shown
20 in the memory 305 that there is an E-mail.

When an E-mail 104b is stored, a status table concerning this E-mail 104b is established as shown in FIGs. 5 through 7.

Then, the process controlling part 304 of the telephone 201 determines whether there is a transmission mail (a mail to be transmitted) in the memory 305 or not (Step 905). When there is a transmission mail in the

5 memory 305, the process controlling part 304 transmits this transmission mail to the provider server 104 (Step 906) and finishes to access the provider server 104 (Step 907). The provider server 104 transmits this transmission mail to another server (not shown) based on

10 TCP/IP (Transmission Control Protocol / Internet Protocol).

Next, an explanation will be given of a case in that the E-mail 104b stored in the memory 305 of the telephone 201 is used from an external terminal device.

15 First, the terminal device 101 calls the telephone 201 through the telephone line 106 (Step 1001). Then, the E-mail 104b in the memory 305 is read by the data communication function of the telephone 201, namely, by the control of the process controlling part 304, and

20 this E-mail 104b is taken in the terminal device 101 through the telephone line 106. At this time, the process controlling part 304 compares an access ID transmitted from the terminal device 101 with an

authorization ID stored in the memory 305 (Step 1002).
Then, it is checked whether or not there is an E-mail
unread by the terminal device 101 by referring the mail
status table 501 (Step 1003).

5 In this embodiment, since there is an unread E-mail
104b, this E-mail 104b is taken in the terminal device
101 (Step 1004).

 When the E-mail 104b in the telephone 201 is read
by the terminal device in this way, the status table 501
10 is rewritten as shown in FIG. 5.

 Then, it is judged whether or not there is an
E-mail transmitted to all of the terminal devices
registered in the status table 501 (Step 1005). When
there is such a E-mail in the status table, this E-mail
15 is deleted (Step 1006).

 Continuously, it is judged whether or not there is
a transmission mail in the terminal device 101 (Step
1008). When there is a transmission mail (a mail to be
transmitted), this transmission mail is transmitted to
20 the telephone 201 (Step 1009). The transmission mail
from the terminal device 101 has an emergency flag at
the header thereof. When the emergency flag stands,
namely, the transmission mail is an emergency mail (Step

1010), the telephone 201 receiving this emergency mail deals with this emergency mail by giving priority (Step 1012). In other words, when an emergency mail is received, this emergency mail is stored in the memory 5 305 once, and the telephone 201 accesses the provider server 104 so as to execute a process transmitting this emergency mail to the provider server 104.

The telephone 201, when being instructed by the terminal device so as to deal with a mail though this 10 mail is not an emergency mail (Step 1011), deals with this mail by giving priority.

The process controlling part 304 judges whether or not there is another unread mail (Step 1013). When there is another unread mail, the processes of the steps 1004 15 through 1014 are repeated. When there is no unread mail, the terminal device 101 finishes the access to the telephone 201 (Step 1014).

Next, an explanation will be given of a case in that the E-mail 104b in the telephone 201 is used with 20 another terminal device 102 or 103.

First, the terminal device 102 or 103 (the electronic equipment 103 in FIG. 2) is arranged at a position facing to the infrared communication part

306, and the E-mail 104b in the memory 305 is down-loaded to the terminal device 102 or 103 by the infrared-ray communication. As the results, the status table 501 varies as shown in FIGs. 6 and 7. When the E-mail 104b is finally down-loaded by the terminal device 103, the process controlling part 304 refers to the process table 801, recognizes that the process mode of the terminal device 103 is "deletes", and deletes the E-mail 104b in the memory 305.

10 According to the present invention, though one person transmits and receives E-mails with plural terminal devices, it is possible to manage E-mails integratedly without imposing a burden on the provider server. Thus, it is possible to deal with E-mails
15 effectively.

 This invention being thus described, it will be obvious that the same may be varied in various ways. Such variations are not to be regarded as departure from the spirit and scope of the invention, and all such
20 modifications would be obvious for one skilled in the art intended to be included within the scope of the following claims.

WHAT IS CLAIMED IS:

1. A telephone with an electronic mail managing
function, said telephone capable of connecting with at
least a mail server and a plurality of terminal devices,
5 said telephone comprising:

access means for accessing to the mail server;

a mail memory for storing an electronic mail down-
loaded from the mail server through the access means;

a mail status memory for storing each status of the
10 electronic mail stored in the mail memory so as to
correspond to each of the terminal devices; and

transmission means for transmitting the electronic
mail stored in the mail memory to one of the terminal
devices.

15 2. A telephone with an electronic mail managing
function according to Claim 1, wherein said mail status
memory means stores whether or not the electronic mail
is down-loaded to each of the terminal devices.

3. A telephone with an electronic mail managing
20 function according to Claim 1, said telephone further

comprising:

a process table for storing a process to be applied to the electronic mail after down-loading for each of the terminal devices.

5 4. A telephone with an electronic mail managing function according to Claim 3, said the process to be applied to the electronic mail after down-loading includes to delete the electronic mail and to keep the electronic mail.

10 5. A telephone with an electronic mail managing function according to Claim 1, said telephone further comprising:

 emergency process means for judging whether or not a priority process is necessary based on the electronic
15 mail received from each of the terminal devices and for executing an access to the mail server when the priority process is executed.

 6. A telephone with an electronic mail managing function according to Claim 1, said telephone further
20 comprising:

an identifier memory for storing an identifier of
an terminal device to be connected;

wherein it is permitted to access from the terminal
device of which an identifier coincides with the stored
5 identifier.

7. A mail managing method in a mail managing
apparatus capable of transmitting/receiving mail data
to/from at least a mail server and a plurality of
terminal devices, said method comprising:

10 a reading step of reading a mail stored in the mail
server;

a storing step of storing the mail read in the
reading step;

a display step of displaying a status of the mail
15 stored in the storing step for each of the terminal
devices; and

a transmission step of transmitting the mail stored
in the storing step to one of the terminal devices.

20 7. A storage medium storing a program used for a
mail managing apparatus capable of
transmitting/receiving mail data to/from at least a mail

server and a plurality of terminal devices, said program comprising:

a reading step of reading a mail stored in the mail server;

5 a storing step of storing the mail read in the reading step;

a display step of displaying a status of the mail stored in the storing step for each of the terminal devices; and

10 a transmission step of transmitting the mail stored in the storing step to one of the terminal devices.

ABSTRACT OF THE DISCLOSURE

The present invention introduces that E-mails are managed effectively without imposing a burden on a mail server. A memory is provided in a telephone, whereby an E-mail from the mail server can be down-loaded. When this telephone is accessed from plural terminal devices, the mail status is stored in order to be capable of recognizing that a E-mail is down-loaded to which terminal device. With this system, when E-mails are transmitted and received with plural terminal device, it is possible to manage E-mails integratedly by accessing not a mail server but a telephone.

FIG. 1
PRIOR ART

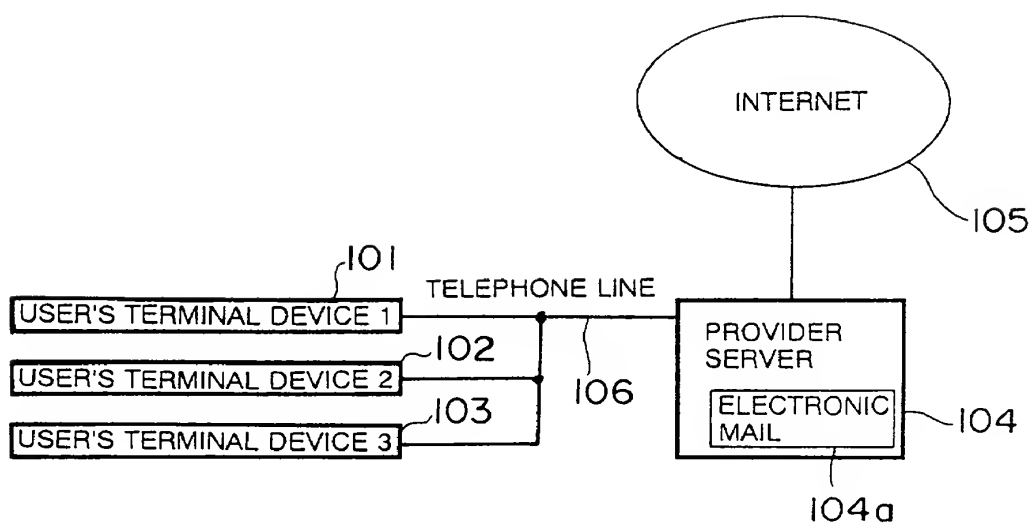


FIG. 2

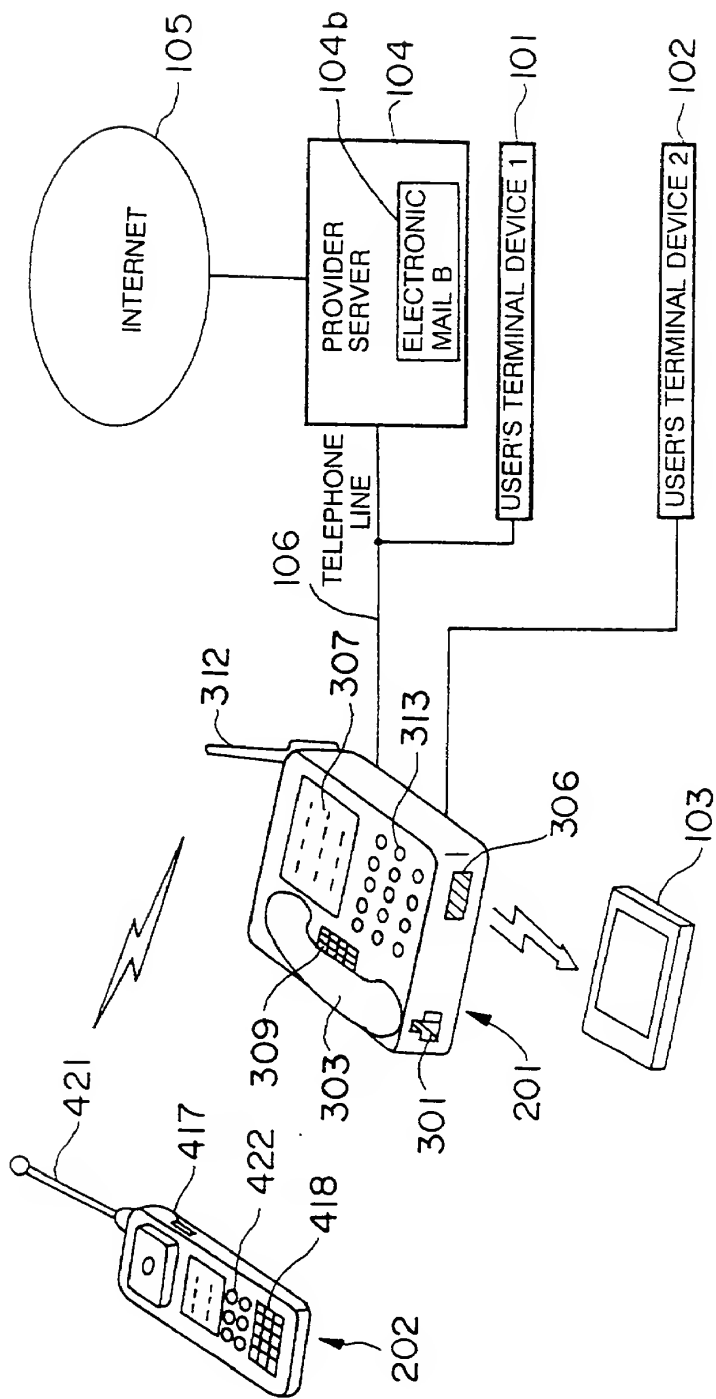


FIG. 3

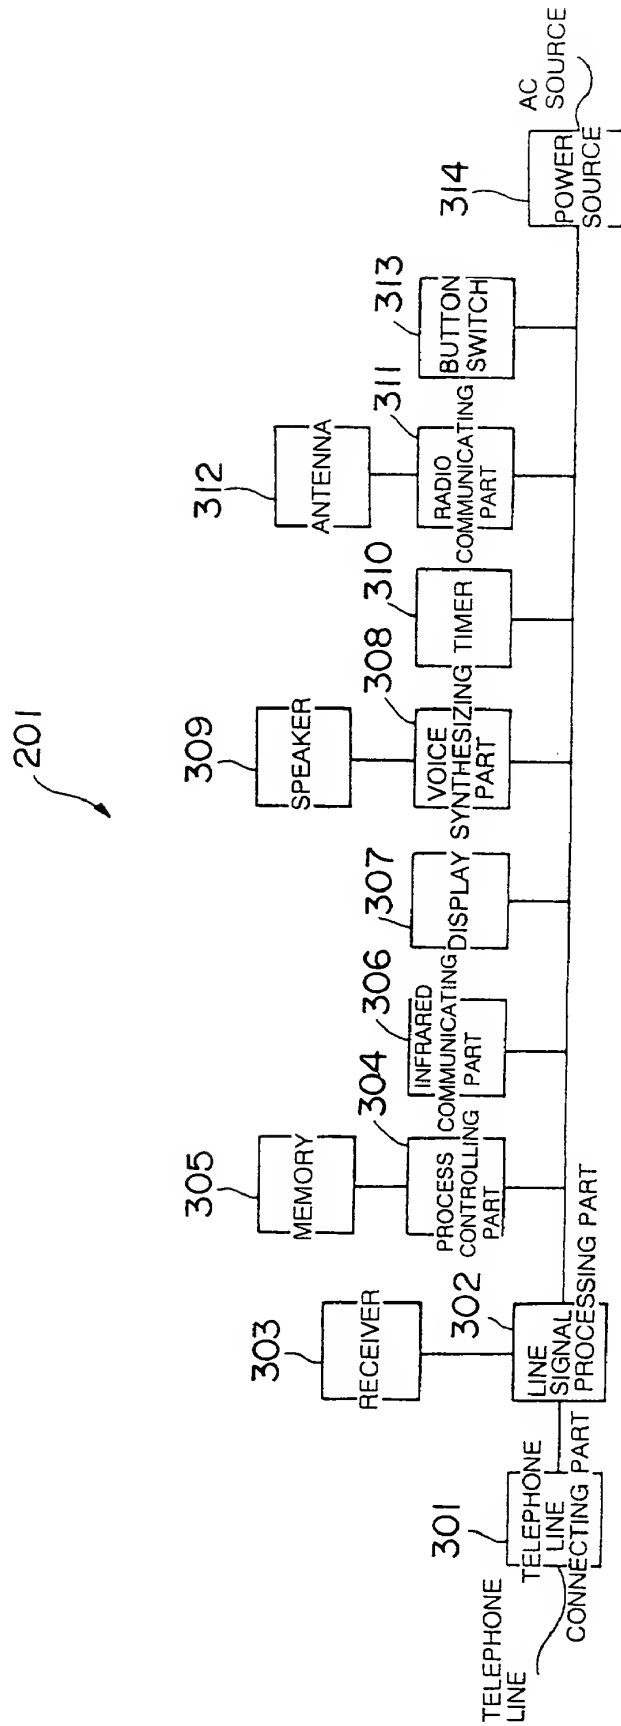


FIG. 4

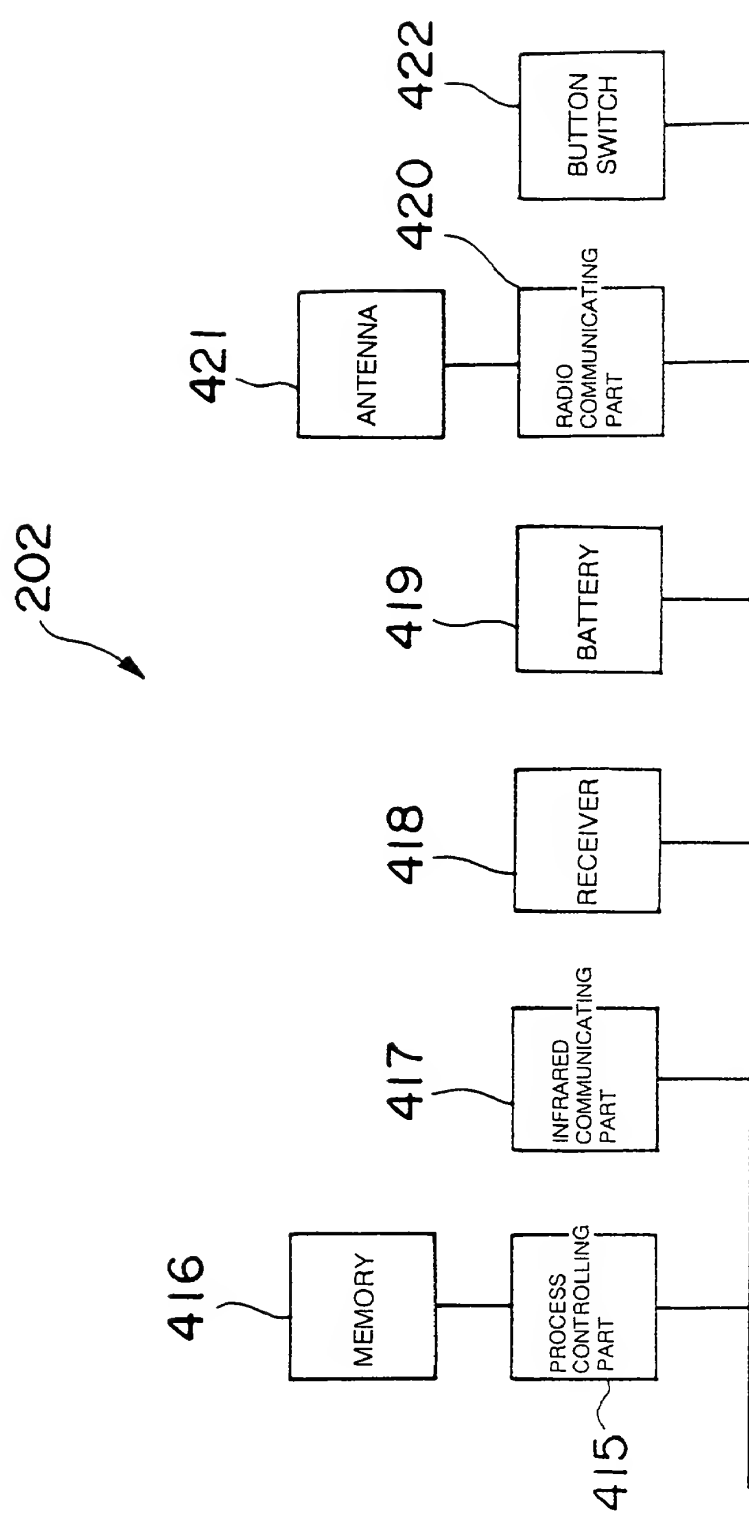


FIG. 5

501

INFORMATION NAME	DEVICE 1	DEVICE 2	DEVICE 3
ELECTRONIC MAIL B	TRANSMITTED	UNTRANSMITTED	UNTRANSMITTED
.....

FIG. 6

501

INFORMATION NAME	DEVICE 1	DEVICE 2	DEVICE 3
ELECTRONIC MAIL B	TRANSMITTED	TRANSMITTED	UNTRANSMITTED
.....

FIG. 7

501

INFORMATION NAME	DEVICE 1	DEVICE 2	DEVICE 3
ELECTRONIC MAIL B	TRANSMITTED	TRANSMITTED	TRANSMITTED
.....

FIG. 8

801

DEVICE ID	PROCESS
DEVICE 1	STORE
DEVICE 2	STORE
DEVICE 3	DELETE
-----	-----

FIG. 9


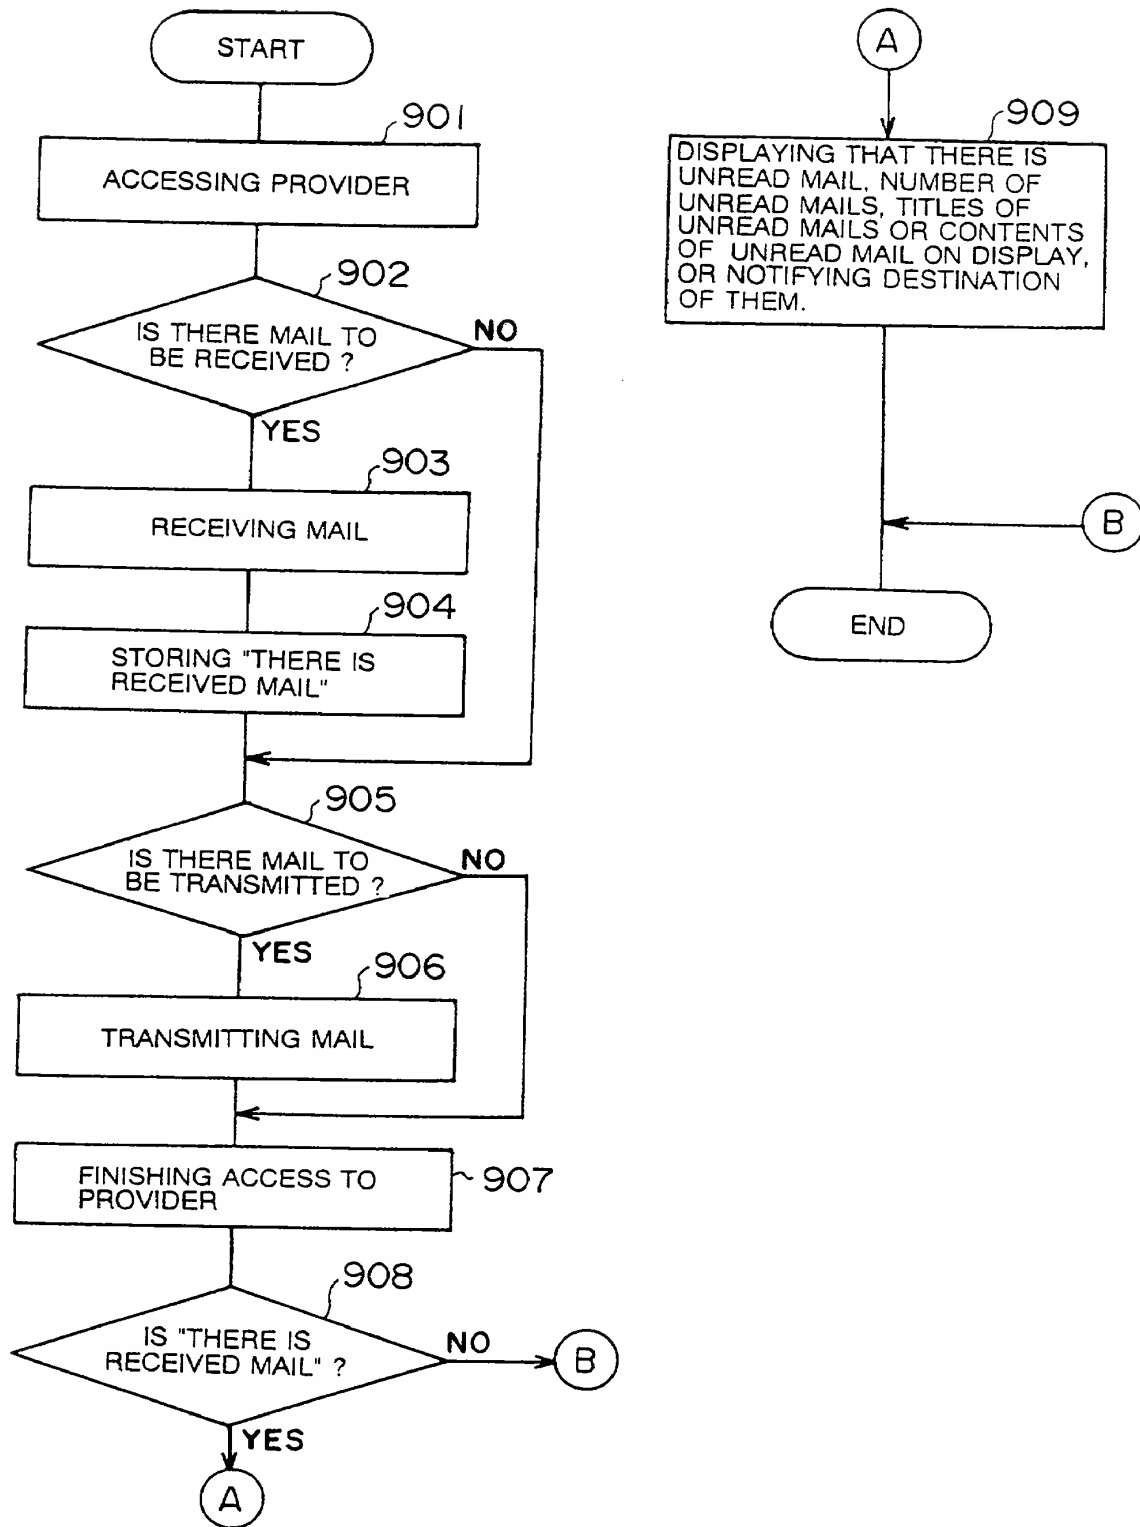


FIG. 10

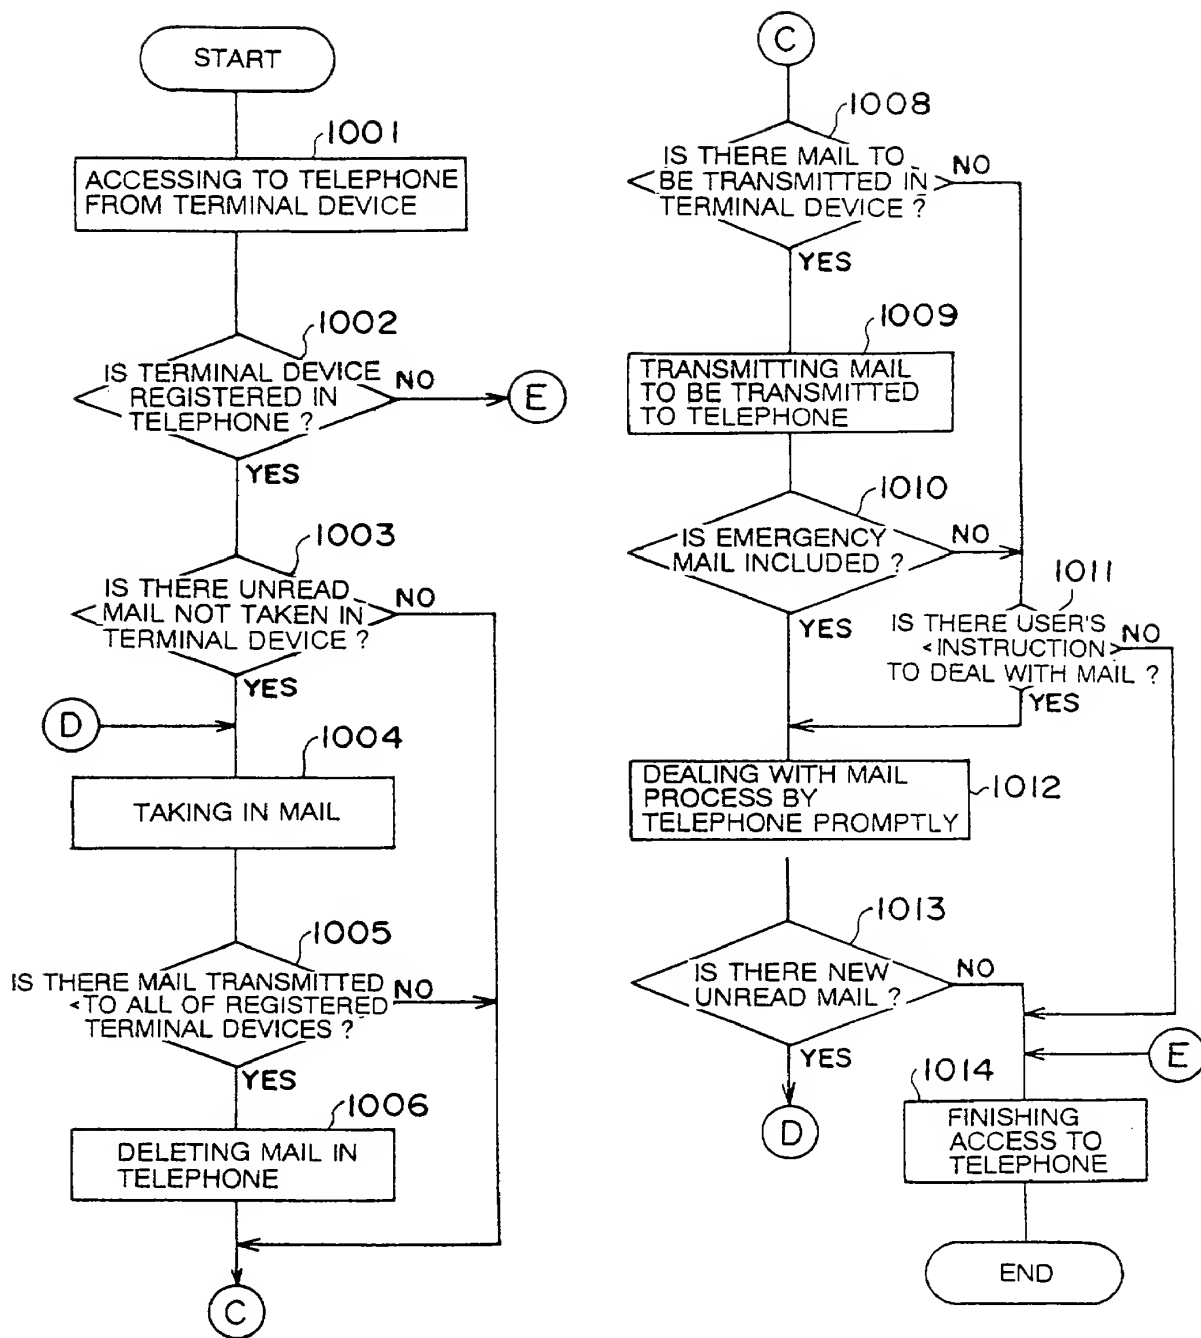

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

以下の氏名を発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、郵便番、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and

for which a patent is sought on the invention entitled

" TELEPHON WITH ELECTRONIC MAIL MANAGEMENT
FUNCTION, ELECTRONIC MAIL MANAGEMENT METHOD,
AND STORAGE MEDIUM STORING ELECTRONIC
MAIL MANAGEMENT PROGRAM "上記発明の明細書（下記の欄でX印がついていない場合は、
ここに添付）は、the specification of which is attached hereto unless the following
box is checked:☐ 月 日に提出され、米国出願番号または特許協定条約
国際出願番号を _____ とし、
（該当する場合） _____ に訂正されました。☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).私は、特許請求範囲を含む上記訂正後の明細書を検討し、
内容を理解していることをここに表明します。I hereby state that I have reviewed and understand the contents of
the above identified specification, including the claims, as
amended by any amendment referred to above.私は、連邦規則第37編第1章56項に定義されると
おり、特許資格の有無について重要な情報を開示する義務が
あることを認めます。I acknowledge the duty to disclose information which is material to
patentability as defined in Title 37, Code of Federal Regulations,
Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願
10-51137

(Number)
(番号)

Japan
(Country)
(国名)

March 3, 1998

(Day/Month/Year Filed)
(出願年月日)

Priority Not Claimed

優先権主張なし

☐

(Number)
(番号)

(Country)
(国名)

(Day/Month/Year Filed)
(出願年月日)

☐

私は、第35編米国法典119条(e)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行えば、出願した、又は共に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

委任状 私は下記の発明者として、不出願に関する一切の
手続を米特許審判局に対して遂行する弁理士または代理人
として、下記の者を指名いたします。(弁理士、または代理
士名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint
the following attorney(s) and/or agent(s) to prosecute this
application and transact all business in the Patent and Trademark
Office connected therewith (list name and registration number)

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers, 30,358;
William F. Herbert, 31,024; Richard A. Gollhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D. Stein, 37,240; Paul
I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlette, 35,269; Harlan B. Williams, Jr., 34,756; George N. Stevens, 36,938;
Michael C. Soldner, P-41,455 and William M. Schertler, 35,348 (agent)

書類送付先

Send Correspondence to:

STAAS & HALSEY
700 Eleventh Street, N.W.
Suite 500
Washington, D.C. 20001

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

STAAS & HALSEY
(202) 434-1500

唯一または第一発明者名		Full name of sole or first inventor	
		Hiroshi ISOMURA	
発明者の署名	日付	Inventor's signature	Date
		Hiroshi Isomura	
住所		Residence	
		Kawasaki-shi, Kanagawa, Japan	
国籍		Citizenship	
		Japan	
郵便番号		Post Office Address	
		c/o Fujitsu Limited, 1-1, Kamikodanaka	
		4-chome, Nakahara-ku, Kawasaki-shi,	
		Kanagawa, 211-8588 Japan	
第二共同発明者		Full name of second joint inventor, if any	
第二共同発明者	日付	Second inventor's signature	Date
住所		Residence	
国籍		Citizenship	
郵便番号		Post Office Address	

(第三以降の共同発明者についても同様に記載し、署名を
すること)

(Supply similar information and signature for third and subsequent
joint inventors.)